

> RGA

AIR-WATER CHILLERS AND HEAT PUMPS
FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, thermostatic expansion valve (standard for IR) or electronic expansion valve (standard for IP / option for IR),

reverse cycle valve, dehydrator filter, axial fans with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins with subcooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger. The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module available in the configurations :

- Storage tank arranged as buffer on the flow or as primary-secondary buffer
- 1 or 2 pumps
- standard or high head pump
- modulating pump

Expansion valve

- thermostatic
- electronic (standard for IP)

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

Accessories

[Rubber vibration dampers](#)

[Spring vibration dampers](#)

[Coil protection grilles](#)

[Tank antifreeze electrical heater](#)

[Remote control](#)

[Modbus serial interface on RS485](#)

[Programmer clock](#)

[Phase sequence and voltage controller](#)

[Low temperature kit \(standard for IP\)](#)

[High and low pressure gauges](#)

[High temperature thermostat](#)

[Coil shut off valves](#)

[Outdoor air sensor](#)

[Water flow switch](#)

[Vicatonic hydraulic fittings](#)

NOMINAL performances - Standard plants - EUROVENT certified data

Nominal performances			Standard plants	Eurovent certified data													
IR	Base setting up (AB)			40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	45,3	53,5	58,6	68,8	78,7	91,0	102	112	126	143	158	180	200	kW		
	Power input	15,4	18,3	20,3	23,5	27,4	31,8	35,2	39,1	44,1	50,4	55,9	63,2	70,0	kW		
	EER	2,94	2,92	2,89	2,93	2,87	2,86	2,90	2,86	2,86	2,84	2,83	2,85	2,86	-		
	ESEER	4,18	4,15	4,10	4,16	4,08	4,18	4,11	4,18	4,06	4,14	4,01	4,04	4,06	-		
	Pressure drops	40	56	55	51	50	48	46	44	48	47	48	48	50	kPa		
IR	Low noise setting up (AS)			40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	43,9	51,9	56,8	66,7	76,3	88,2	98,5	109	122	139	153	175	194	kW		
	Power input	16,0	19,0	21,1	24,4	28,6	33,1	36,6	40,7	45,9	52,4	58,1	65,7	72,8	kW		
	EER	2,74	2,73	2,69	2,73	2,67	2,66	2,69	2,68	2,66	2,65	2,63	2,66	2,66	-		
	ESEER	4,05	4,03	3,98	4,04	3,94	4,05	3,97	4,07	3,93	4,03	3,89	3,93	3,94	-		
	Pressure drops	38	53	52	48	47	45	43	42	45	44	45	45	47	kPa		
IR	eXtra low noise setting up (AX)			40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	42,9	50,7	55,5	65,2	74,5	86,2	96,2	106	119	135	150	170	189	kW		
	Power input	16,1	19,4	21,7	24,9	29,4	32,2	37,7	41,9	47,3	53,4	59,3	67,6	74,9	kW		
	EER	2,66	2,61	2,56	2,62	2,53	2,68	2,55	2,53	2,52	2,53	2,53	2,51	2,52	-		
	ESEER	4,21	4,13	4,04	4,14	4,00	4,35	4,03	4,11	3,98	4,11	4,00	3,97	3,99	-		
	Pressure drops	36	50	49	46	45	43	41	39	43	42	43	43	45	kPa		
IP	Base acoustic setting up (AB)			40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	43,8	52,9	57,5	67,2	74,1	89,2	99,0	110	122	138	154	178	198	kW		
	Power input	15,2	18,5	20,2	23,6	26,5	31,6	35,0	39,0	43,6	49,3	55,2	62,2	69,7	kW		
	EER	2,88	2,86	2,85	2,85	2,80	2,82	2,83	2,82	2,80	2,80	2,79	2,86	2,84	-		
	ESEER	4,09	4,06	4,04	4,04	3,97	4,12	4,02	4,12	3,97	4,09	3,96	4,06	4,03	-		
	Pressure drops	37	55	53	49	44	46	43	45	44	46	47	49	49	kPa		
IP	Low noise setting up (AS)			40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A7W45	Cooling capacity	42,0	50,8	55,2	64,5	71,1	85,6	95,0	106	117	132	148	171	190	kW		
	Power input	15,8	19,6	21,4	25,0	28,1	33,5	37,1	41,3	46,2	52,3	58,5	65,9	73,9	kW		
	COP	3,12	3,11	3,08	3,11	3,06	3,03	3,11	3,10	3,09	3,03	3,09	3,08	3,07	-		
	Pressure drops	45	65	63	59	55	57	53	54	55	54	56	56	57	kPa		
	Heating capacity	47,8	57,5	62,6	73,8	82,3	98,7	109	124	135	153	171	195	214	kW		
IP	Low noise setting up (AS)			40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A7W45	Cooling capacity	42,0	50,8	55,2	64,5	71,1	85,6	95,0	106	117	132	148	171	190	kW		
	Power input	15,8	19,6	21,4	25,0	28,1	33,5	37,1	41,3	46,2	52,3	58,5	65,9	73,9	kW		
	EER	2,66	2,59	2,58	2,58	2,53	2,56	2,56	2,57	2,53	2,52	2,53	2,59	2,57	-		
	ESEER	3,93	3,83	3,81	3,81	3,74	3,88	3,78	3,90	3,74	3,83	3,74	3,83	3,80	-		
	Pressure drops	35	50	49	45	41	42	40	39	41	40	42	43	45	kPa		
A7W45	Heating capacity			46,6	56,0	61,1	71,9	80,2	96,2	106	121	132	149	167	190	209	kW
A7W45	Power input	14,6	17,7	19,4	22,6	25,7	31,1	33,4	38,2	41,7	48,2	52,9	60,5	66,7	kW		
	COP	3,19	3,16	3,15	3,18	3,12	3,09	3,17	3,17	3,17	3,09	3,16	3,14	3,13	-		
	Pressure drops	43	61	60	56	52	54	50	51	53	51	54	54	55	kPa		
IP	eXtra low noise setting up (AX)			40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	41,2	49,7	54,1	63,2	69,7	83,8	93,1	103	115	130	145	167	186	kW		
	Power input	16,9	20,7	22,6	26,4	29,7	35,4	39,2	43,7	48,8	55,2	61,8	69,7	78,1	kW		
	EER	2,44	2,40	2,39	2,39	2,35	2,37	2,38	2,36	2,36	2,35	2,40	2,38	-			
	ESEER	3,85	3,79	3,78	3,78	3,71	3,85	3,75	3,83	3,72	3,83	3,71	3,79	3,76	-		
	Pressure drops	33	48	47	43	39	41	38	37	40	39	40	41	43	kPa		
A7W45	Heating capacity			44,9	54,0	58,9	69,4	77,4	92,8	103	117	127	144	161	183	201	kW
A7W45	Power input	13,9	16,8	18,5	21,6	24,5	29,7	31,9	36,4	39,8	46,0	50,4	57,7	63,5	kW		
	COP	3,23	3,21	3,18	3,21	3,16	3,12	3,23	3,21	3,19	3,13	3,19	3,17	3,17	-		
	Pressure drops	40	57	55	52	48	50	47	48	49	48	50	50	50	kPa		

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

TECHNICAL DATA	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Power supply						400 - 3+N - 50					400 - 3 - 50			V-ph-Hz
Compressor type								scroll						-
N° compressors / N° refrigerant circuits								2 / 1						n°
Plant side heat exchanger type								stainless steel brazed plates						-
Source side heat exchanger type								finned coil						-
Fans type								axial						-
N° fans	2				3			2			3		4	n°
Tank volume			200					400			460			l
Hydraulic fittings				2" VICTAULIC				2" 1/2 VICTAULIC						-

NOMINAL performances - Standard plants

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35W7	Cooling capacity	45,0	53,0	58,1	68,2	78,1	90,3	101	111	125	142	157	179	198
	Power input	15,7	18,8	20,8	24,1	28,0	32,5	35,9	39,9	45,1	51,5	57,1	64,6	71,6
	EER	2,87	2,82	2,79	2,83	2,79	2,78	2,81	2,78	2,77	2,76	2,75	2,77	2,77
	Water flow rate	2,16	2,56	2,80	3,29	3,76	4,35	4,87	5,35	6,02	6,83	7,55	8,60	9,56
	Pressure drops	40	56	55	51	50	48	46	44	48	47	48	48	50
IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35W7	Cooling capacity	43,5	52,4	57,0	66,7	73,6	88,5	98	109	121	137	153	177	196
	Power input	15,5	19,0	20,7	24,1	27,0	32,3	35,7	39,8	44,5	50,3	56,3	63,5	71,2
	EER	2,81	2,76	2,75	2,77	2,73	2,74	2,75	2,74	2,72	2,72	2,72	2,79	2,75
	Water flow rate	2,09	2,53	2,75	3,21	3,54	4,26	4,73	5,26	5,83	6,59	7,36	8,50	9,46
	Pressure drops	37	55	53	49	44	46	43	43	45	44	46	47	49
A7W45	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A7W45	Heating capacity	48,1	58,1	63,2	74,5	83,0	99,6	110	125	136	154	173	197	216
	Power input	15,6	19,1	20,9	24,4	27,6	33,5	35,9	41,1	44,9	51,8	56,9	65,1	71,7
	COP	3,08	3,04	3,02	3,05	3,01	2,97	3,06	3,04	3,03	2,97	3,04	3,03	3,01
	Water flow rate	2,28	2,75	2,99	3,53	3,93	4,72	5,21	5,92	6,45	7,31	8,17	9,32	10,2
	Pressure drops	45	65	63	59	55	57	53	54	55	54	56	56	57

Data declared according to EN 14511. The values are referred to units without options and accessories.

NOMINAL performances - Radiant plants

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35W18	Cooling capacity	58,3	68,5	75,1	88,2	100,6	116	131	144	162	184	202	231	257
	Power input	17,1	20,8	22,9	26,4	30,8	35,6	39,4	43,6	49,4	56,4	62,5	70,7	78,5
	EER	3,41	3,29	3,28	3,34	3,27	3,26	3,32	3,30	3,28	3,26	3,23	3,27	3,27
	Water flow rate	2,81	3,33	3,64	4,27	4,87	5,64	6,35	6,98	7,84	8,89	9,8	11,2	12,4
	Pressure drops	68	95	93	86	84	81	78	75	81	80	81	81	84
IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35W18	Cooling capacity	56,3	67,8	73,7	86,3	95,2	115	127	141	157	177	198	228	254
	Power input	16,9	20,9	22,8	26,4	29,7	35,2	39,0	43,4	48,8	54,9	61,7	69,5	78,1
	EER	3,33	3,24	3,23	3,27	3,21	3,27	3,26	3,25	3,22	3,22	3,21	3,28	3,25
	Water flow rate	2,72	3,29	3,57	4,18	4,60	5,54	6,16	6,83	7,60	8,55	9,56	11,0	12,3
	Pressure drops	63	92	89	82	75	78	74	72	77	74	77	79	83
A7W35	Base setting up (AB)	51,1	61,7	67,1	79,0	88,0	106	117	132	144	164	183	209	229
A7W35	Power input	12,9	15,7	17,3	20,1	22,7	27,9	29,8	34,0	37,1	43,0	47,2	54,3	59,6
	COP	3,96	3,93	3,88	3,93	3,88	3,80	3,93	3,88	3,88	3,81	3,88	3,85	3,84
	Water flow rate	2,42	2,91	3,17	3,74	4,17	5,02	5,54	6,26	6,83	7,74	8,65	9,89	10,8
	Pressure drops	50	72	70	66	61	64	60	62	60	63	63	64	64

Data declared according to EN 14511. The values are referred to units without options and accessories.

Acoustic performances

	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
Sound power level	Sound power level	80	80	83	84	84	85	85	85	86	87	87	88	88
	Sound pressure level at 1 metre	62	62	65	66	66	67	67	67	68	69	69	69	69
	Sound pressure level at 5 metres	53	53	56	57	57	58	58	58	59	60	60	61	61
	Sound pressure level at 10 metres	48	48	51	52	52	53	53	53	54	55	55	56	56
Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	Sound power level	77	77	80	81	81	82	82	82	83	84	84	85	85
	Sound pressure level at 1 metre	59	59	62	63	63	64	64	64	65	66	66	66	66
	Sound pressure level at 5 metres	50	50	53	54	54	55	55	55	56	57	57	58	58
	Sound pressure level at 10 metres	45	45	48	49	49	50	50	50	51	52	52	53	53
eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	Sound power level	75	75	78	79	79	80	80	80	81	82	82	83	83
	Sound pressure level at 1 metre	57	57	60	61	61	62	62	62	63	64	64	64	64
	Sound pressure level at 5 metres	48	48	51	52	52	53	53	53	54	55	55	56	56
	Sound pressure level at 10 metres	43	43	46	47	47	48	48	48	49	50	50	51	51

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 3744 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

OPERATING LIMITS	Unit type	Cooling		Heating	
		min	max	min	max
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	50	-10	40*
Water outlet temperature	IR, IP	5	25	30	55
Water outlet temperature	BR, BP	-12	25	30	55
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70
Water outlet temperature (VR)	IR, BR	30	55	-	-

* with fans modulating control option (condensation / evaporation control)

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat. The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desuperheater Version (VD)

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35W7 - W45	Cooling capacity	47,1	55,6	60,9	71,6	81,8	94,6	106	116	131	149	164	187	208
	Total power input	15,0	17,8	19,7	22,8	26,6	31,0	34,3	38,0	42,9	49,1	54,4	61,5	68,1
	EER	3,14	3,12	3,09	3,14	3,08	3,05	3,09	3,05	3,05	3,03	3,01	3,04	3,05
	Water flow rate	2,25	2,66	2,91	3,42	3,91	4,52	5,06	5,54	6,26	7,12	7,84	8,93	9,94
	Water pressure drop	43	60	59	55	54	52	50	47	52	51	52	52	54
	Heating recovery capacity	13,5	15,7	17,6	20,0	23,6	27,1	30,4	34,4	38,4	44,0	49,3	55,4	61,3
	Water flow rate recovery	0,65	0,75	0,84	0,96	1,13	1,29	1,45	1,64	1,83	2,10	2,36	2,65	2,93
	Water pressure drop recovery	6	9	11	14	19	15	18	11	14	18	22	18	21
IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35W7 - W45	Cooling capacity	45,6	55,0	59,8	69,9	77,1	92,8	103	114	127	144	160	185	206
	Total power input	14,8	18,0	19,6	22,9	25,8	30,8	34,1	37,9	42,4	48,0	53,7	60,6	67,8
	EER	3,08	3,06	3,05	3,05	2,99	3,01	3,02	3,01	3,00	3,00	2,98	3,05	3,04
	Water flow rate	2,18	2,63	2,86	3,34	3,68	4,43	4,92	5,45	6,07	6,88	7,64	8,84	9,84
	Water pressure drop	41	59	57	53	48	50	47	46	49	48	49	51	53
	Heating recovery capacity	13,0	15,2	17,0	19,4	22,9	26,2	29,2	33,2	37,1	42,4	47,5	52,4	58,1
	Water flow rate recovery	0,62	0,73	0,81	0,93	1,09	1,25	1,40	1,59	1,77	2,03	2,27	2,50	2,78
	Water pressure drop recovery	6	8	10	13	18	14	17	10	13	17	21	16	19

Total Recovery Version (VR)

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35W7 - W45	Cooling capacity	47,1	55,6	60,9	71,6	81,8	94,6	106	116	131	149	164	187	208
	Total power input	13,6	16,4	17,8	20,8	24,6	27,1	30,3	34,1	38,9	43,2	48,5	53,8	60,3
	EER	3,46	3,39	3,42	3,44	3,33	3,49	3,50	3,40	3,37	3,45	3,38	3,48	3,45
	EER with recovery	7,88	7,73	7,79	7,84	7,59	7,92	7,95	7,74	7,69	7,85	7,71	7,90	7,84
	Water flow rate	2,25	2,66	2,91	3,42	3,91	4,52	5,06	5,54	6,26	7,12	7,84	8,93	9,94
	Water pressure drop	43	60	59	55	54	52	50	47	52	51	52	52	54
	Heating recovery capacity	60,0	71,2	77,8	91,4	105	120	135	148	168	190	210	238	265
	Water flow rate recovery	2,87	3,40	3,72	4,37	5,02	5,73	6,45	7,07	8,03	9,08	10,0	11,4	12,7
	Water pressure drop recovery	35	49	41	45	50	48	52	47	52	51	52	55	55

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

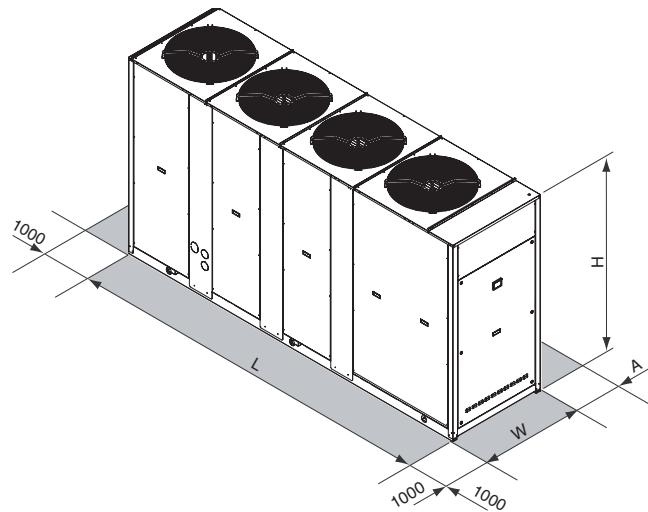

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
L			2501			3343			3343		4097			mm
W			954			1104			1104		1104			mm
H			1930			1793			2193		2193			mm
A			1600							2000				mm
Operating maximum weight	1027	1031	1053	1088	1107	1587	1668	1749	1833	1891	1935	2260	2296	kg